

**MX FUEL REDLITHIUM™**

**PACKS FOR EVERY DEMAND**

**SPECIFICATIONS**

DESCRIPTION	SPECIFICATIONS
Compatibility	Fits All MX FUEL Equipment
Charge Duration	90 min
Capacity	6.0 Ah
Fuel Gauge	Yes
REDLINK Intelligence	Yes

DESCRIPTION	SPECIFICATIONS
Compatibility	Fits All MX FUEL Equipment
Charge Duration	55 min
Capacity	3.0 Ah
Fuel Gauge	Yes
REDLINK Intelligence	Yes

DESCRIPTION	SPECIFICATIONS
Compatibility	Charges All MX FUEL Equipment
Charge Speed	Charges MX FUEL REDLITHIUM CP203 Battery
	Charges MX FUEL REDLITHIUM XC406 Battery
REDLINK Intelligence	Yes
On-Board Fan	Yes
Cell Voltage Monitoring	Yes
On-Board Indicator Light	Yes

**MXF XC406**  
MX FUEL REDLITHIUM  
XC406 Battery Pack

**CHARGES IN  
90MIN**



**MXF CP203**  
MX FUEL REDLITHIUM  
CP203 Battery Pack

**CHARGES IN  
55MIN**



**MXF C**  
MX FUEL Charger



**EQUIPMENT REDEFINED  
TRADE FOCUSED  
SYSTEM WIDE**

**MILWAUKEE TOOL**

Milwaukee Electric Tool Corporation  
BROOKFIELD, WI 53005  
USA

Tel: +1 (262) 781-3600 • Fax: +1 (262) 790-6333

Milwaukee Asia Office

29/F, Tower 2, Kowloon Commerce Centre,  
51 Kwai Cheong Road, Kwai Chung, Hong Kong  
Tel: +852-2492-2181 • Fax: +852-2490-4778

Distributed by:

9/12/2020

All data incl. service and warranty conditions as well as product range are subject to change without notice.  
Pictures not binding. No liability for printing errors or mistakes. © 2020 Milwaukee Electric Tool Corporation.  
All trademarks are owned by Techtronic Cordless GP unless otherwise stated.

[www.milwaukeetool.asia](http://www.milwaukeetool.asia)

**Milwaukee™**

**MX FUEL™**

**EQUIPMENT REDEFINED  
TRADE FOCUSED  
SYSTEM WIDE**



**ALL MX FUEL™ BATTERIES  
FIT ALL MX FUEL™ EQUIPMENT**







## MXF DCD150 152MM / 6" HANDHELD CORE DRILL

### SAFER HANDHELD CORING



■ AUTOSTOP Technology provides more control and prevents over-rotation during bind-up situations

### POWER TO CORE 152MM HOLES IN REINFORCED CONCRETE



■ POWERSTATE Brushless Motor delivers the power to core up to 152mm holes in reinforced concrete

### EASIER CORING ANYWHERE



■ LED Level and pressure gauge provide an easier coring experience




## MXF COS350 350MM / 14" CUT-OFF SAW

### FULL 350MM CAPACITY



■ Cut more in a single pass

### FASTER CUTS FROM START TO FINISH

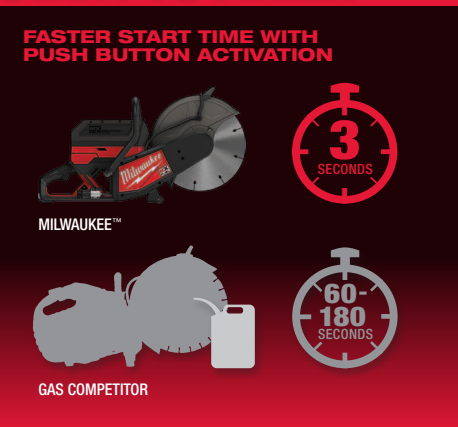

■ Less muscle effort to start with push button activation

### NO GAS HEADACHES




■ Zero emissions, along with less noise and vibration provide a safer workspace

■ Eliminates wearable parts of a gas engine



## MXF DH2528H MX FUEL 28MM HEX BREAKER


### MORE PRODUCTIVE LOWER VIBRATION

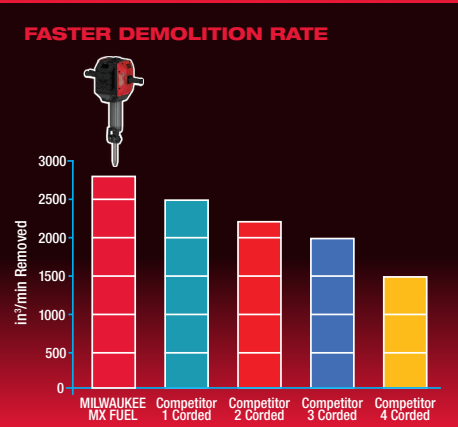

■ POWERSTATE Brushless Motor delivers 50 ft-lbs of impact energy with less vibration

■ 1,300 BPM

### LIGHTER WEIGHT

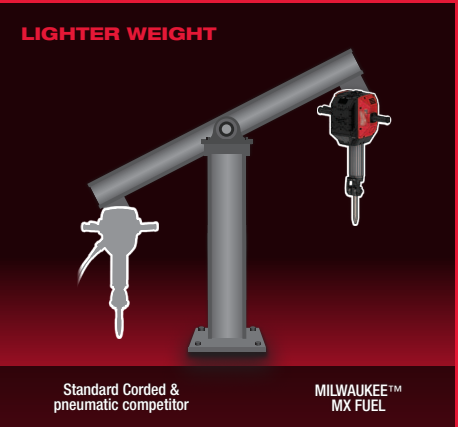

■ Easily maneuver and transport throughout the jobsite

### 2 TONS PER CHARGE



■ Breaks a 305mm x 152mm x 12m trench with one MX FUEL REDLITHIUM XC406 Battery Pack

## RUN-TIME



(5) 76MM HOLES IN 152MM CONCRETE WITH CP BATTERY



(18) 76MM HOLES IN BLOCK WITH XC BATTERY



(9) 76MM HOLES IN BLOCK WITH CP BATTERY

### SPECIFICATIONS

DESCRIPTION	SPECIFICATIONS
Bit Capacity	152mm (6")
Spindle Size	1-1/4"-7, 1/2"G
Adapter Size	A-Rod (32.0mm)
Speed (low/high)	800/1,600 rpm

DESCRIPTION	SPECIFICATIONS
AUTO-STOP	Yes
Wet/Dry Coring	Yes
Weight (w/CP203 battery)	10.3 kg
Dedicated Accessory	Drill Stand (MXF DR255TV)

\*Technronic Asia Company Limited is not affiliated with any of the competitors' products that were tested. The testing was conducted on 18 June 2020 against leading competitors' products.

## RUN-TIME (W/ 2 XC BATTERIES)



4.3M IN CONCRETE  
125MM DEPTH OF CUT



8 CUTS  
203MM DUCTILE IRON PIPE



22 CUTS  
203MM CINDER BLOCK

### SPECIFICATIONS

DESCRIPTION	SPECIFICATIONS
Bit Capacity	350mm (14")
Cut Depth	125mm
Arbor Size	20mm/25.4mm/27mm
Blade Speed	5,370 rpm

\*Technronic Asia Company Limited is not affiliated with any of the competitors' products that were tested. The testing was conducted on 18 June 2020 against leading competitors' products.

## RUN-TIME (W/ 1 XC BATTERY)



12M TRENCH  
305MM WIDE X 152MM DEEP



2 + SIDEWALK SLABS  
1.5M X 1.4M X 15CM DEEP

### SPECIFICATIONS

DESCRIPTION	SPECIFICATIONS
Chuck Size	28mm HEX
Impact Energy	64 J
Blows per Minute	1,300
Vibration	5.17m/s²

\*Technronic Asia Company Limited is not affiliated with any of the competitors' products that were tested. The testing was conducted on 18 June 2020 against leading competitors' products.

DESCRIPTION	SPECIFICATIONS
Buried Chisel Release	Yes
Soft Start	Yes
Weight (w/XC406 battery)	29.6 kg
Dedicated Accessory	Breaker Trolley (MXF DHT)

